

item number / EOL.CE.PL12-48

48W recessed ultra thin panel light

Application

residential or commercial indoor space

Design Specifications

Recessed LED panel light 6500k - 4000k 240 LEDs

48w panel light, 240 LEDs,

input:100-240v , frequency:50/60Hz,

PF 0.92, CCT:6500k-4000k, CRI:80a , beam angle 120,

plate material: Taiwan chime optical grade PMMA LGP

interconnection: DC male & female 2pin clips, IP:42 ,

temp:20-+40, less flicker driver aluminium strong frame


Flex and plug

Performance

Dimmable – dimmable optional Trailing edge, 1-10V, DALI/DSI

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle
EOL.CE.PL12-48	48w led panel light ,	220-240	48	4800lm	4000k-6000k	120
EOL.CE.PL60-48	48w led downlight ,	220-240	48	4800lm	6500k	120
EOL.CE.PL1260-72	72w led downlight ,	220-240	72	7200lm	6500k	120
CRI		COLOUR BODY		box Dimension		
80+		White		1250* 350* 40mm		

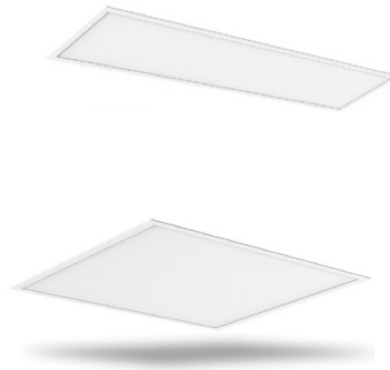

Dimensions




LED Panel

Less Energy, More Power



Dimension Unit: mm

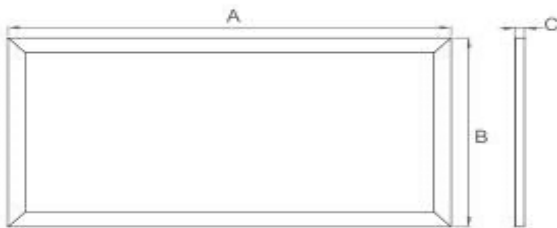

Product Name	A	B	C
300x300	295	295	10
300x600	295	595	10
600x600	595	595	10
300x1200	295	1195	10
620x620	620	620	10
600x1200	595	1195	10